


## Technical site management in the refurbishment of Capitol cinema for a Supercor supermarket

JOB

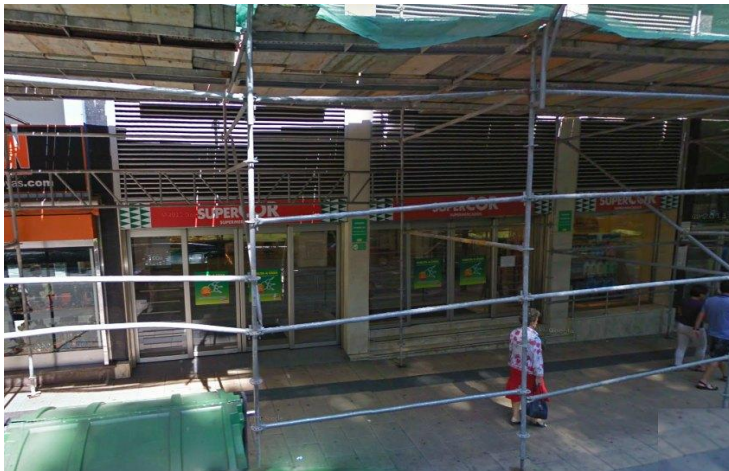

0517  
Santander. Spain

P.O.

LOCATION

IDOM

CLIENT

2,100 m<sup>2</sup>

AREA / LENGTH

1,400,000 €

GLOBAL BUDGET

1,400,000 €

(OF THE TASKS UNDERTAKEN)

Reinforcement and underpinning, project  
Technical site management

TASKS UNDERTAKEN

2005-2006

DATE

DESCRIPTION

The structure of the building, the former Capitol Cinema in Santander, had to be reinforced to bear heavier loads demanded by the new use as a supermarket by Supercor.

The supermarket is located at street level in a nine storey building with a car park below ground level.

The following structural reinforcements were carried out:

- Underpinning of foundations with micropiles and metallic footings.
- Structural reinforcement of the main room with steel sheets, rebars and concrete as a cover layer.
- Reinforcement of concrete columns with metal rings.
- Reinforcement of joists with steel structure.
- Reinforcement of concrete slabs with an additional concrete layer

